




Brambilight
Soluciones en Led



Pantalla LED P3.91 Outdoor

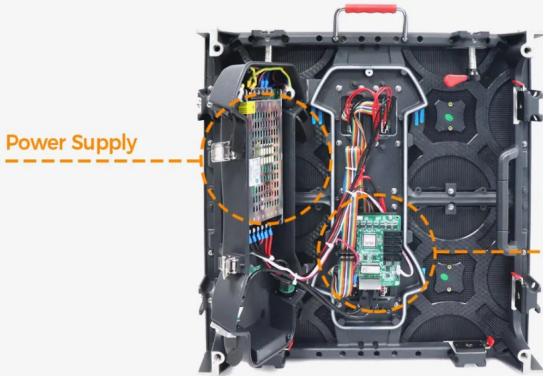

Power Supply


Receive Card



Module

Pixel Configuration	SMD1921
Density (Pixels/m ²)	65,536
Module Resolution (Pixel)	64x64
Module Size (mm)	250x250
Driving Mode (Duty)	1/16
Cabinet Size (mm)	500x500
Cabinet Weight (KG)	7
Brightness (CD/m ²)	≥6,000
Viewing Angle (°)	120
Gray Grade (Bits)	14
Operation Power	AC100-240V 50-60Hz
Max. Power Consumption (W/m ²)	720
Avg. Power Consumption (W/m ²)	240

Frame Frequency (Hz)	≥60
Refresh Frequency (Hz)	≥3,840
Working Temperature (°C)	-20~+60
Lifetime (Hours)	100,000
Protection Grade	IP65(front), IP54(rear)

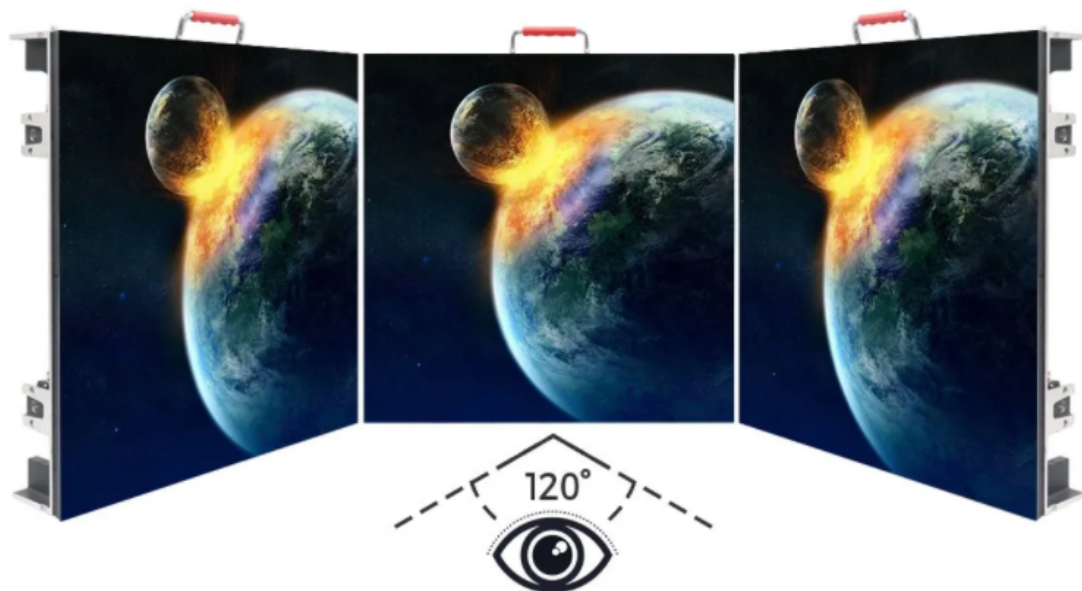

Santander 2069, Colonia Santa Monica CP 44220 Guadalajara Jalisco Mexico
Tel 3823-0404 Soporte 331-342-2632, Ventas 3322-55-2134 y 3334-70-4040