




Brambilight


Soluciones en Led

Pantalla LED P2.5 Indoor

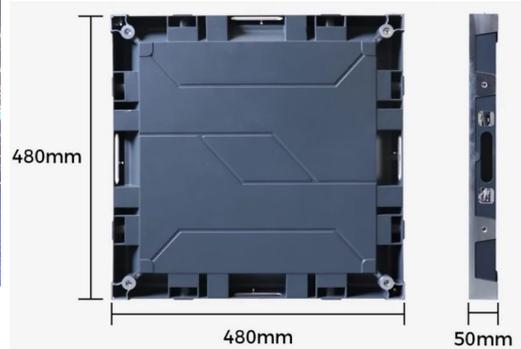

Pixel Configuration	SMD1010
Density (Pixels/m ²)	160000
Module Resolution (Pixel)	96x96
Module Size (mm)	240x240
Driving Mode (Duty)	1/48
Cabinet Size (mm)	480x480
Cabinet Weight (KG)	5.5
Brightness (CD/m ²)	200~500
Viewing Angle (°)	120
Gray Grade (Bits)	≥13
Operation Power	AC100-240V 50-60Hz
Max. Power Consumption (W/m ²)	≤ 500
Avg. Power Consumption (W/m ²)	100~300

Frame Frequency (Hz)	≥60
Refresh Frequency (Hz)	≥2880~3,840
Working Temperature (°C)	-10~+60
Lifetime (Hours)	100,000
Protection Grade	IP35

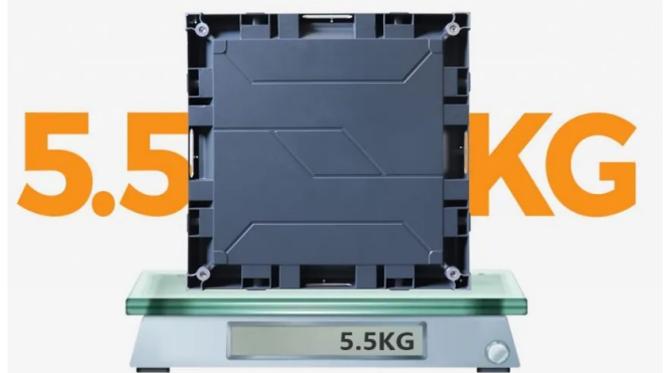

Santander 2069, Colonia Santa Monica CP 44220 Guadalajara Jalisco Mexico
 Tel 3823-0404 Soporte 331-342-2632, Ventas 3322-55-2134 y 3334-70-4040